

**ID-Nr. 30701-015**  
**Model GOD.215.070.R**



**Gas cylinder cabinet G-OD**  
**Model GOD.215.070.R, light grey (RAL 7035)**

**Safe and approved outdoor storage of flammable or toxic gases – for up to 2 x 50-litre gas cylinders**

**Function / construction:**

- **Robust construction and longevity:** completely galvanised and powder-coated structured surface and stainless steel base
- **No unauthorised use:** lockable turning lever (door also available with profile cylinder, compatible for locking system)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **Easy mounting of connecting pipes and gas fittings:** lead-through points in the ceiling of the cabinet
- **Ventilation:** effective ventilation through openings beneath the doors and at the rear wall

Dimensions	
Width (external)	706.00 mm
Depth (external)	400.00 mm
Height (external)	2149.00 mm
Width (internal)	695.00 mm
Depth (internal)	370.00 mm
Height (internal)	2070.00 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	85 kg
Distributed load	699.00 kg/m <sup>2</sup>
Maximum load	600 kg

Ventilation	
Extraction air	75 DN
Minimum exhaust air quantity 10 times	5 m <sup>3</sup> /h
Lead-through possibilities	8

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	textured
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	textured

General Information	
Number of doors	1
Door opening angle	180.00°
Depth with open doors	1034 mm
x 50-litre gas cylinders	2 piece
Customs tariff number	94032080

Front view

Side view

Top view

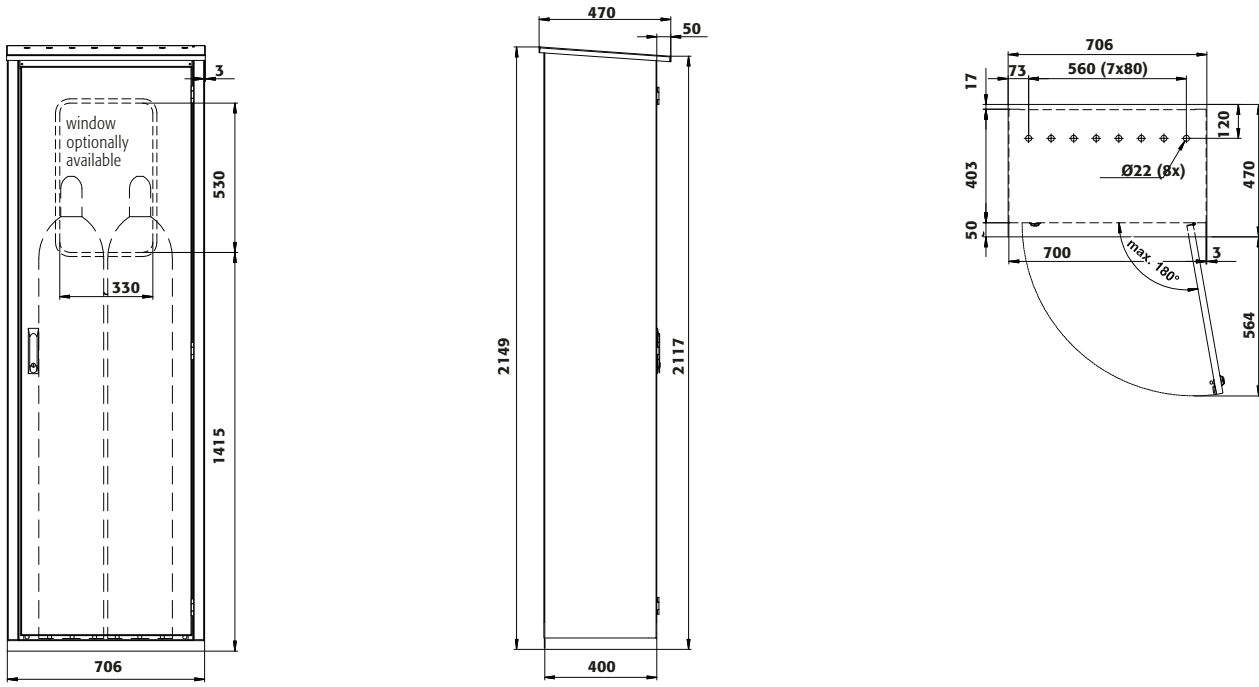


Diagram shows left-hinged door. Dimensions are identical for a right-hinged fitting.