

ID-Nr. 37062-005 Model UB90.060.140.050.UL.S2T



Dimensions	
External width	55.20
External depth	19.76
External height	23.62
Internal Width	50.35
Internal depth	15.04
Internal height	19.76
The available internal dimensions can vary depending on the interior equipment package.	

Weight / Load	
Weight without interior equipment	452
Distributed load	49
Maximum load	661
Ventilation	

Ø2

1.76

Extraction air

Minimum exhaust air quantity 10 times

Differential pressure 10 times air change	0.01
Colouring / Surface finish	
Body color code	
Body color	Laboratory white (sim. RAL 9016)
Body surface finish	plain
n '/n	DAI 7075

204) 54:1440 1111511	Pidii.
Door / Drawer colour code	RAL 7035
Door / Drawer colour	Laboratory white (sim. RAL 9016)
Door / Drawer surface finish	plain
General Information	
Number of doors	2

General Information	
Number of doors	2
Number of drawers	1
Depth with open doors	36.14
Capacity of drawers	2.64
Capacity of bottom collecting sump	4.35
Customs tariff number	94032080






















Flammable under counter unit UB-ST-90 Model UB90.060.140.050.UL.S2T, laboratory white (sim. RAL 9016)

Safe and approved storage of flammable hazardous substances in working areas

Function / construction:

- Robust construction and longevity: body made of powdercoated sheet steel
- **User-friendly and safe:** door and drawer remain open in any position, interior of the cabinet completely visible access to all containers, 93° opening of the wing door
- **Safe:** drawer fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- No unauthorised use: door and drawer lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- Ventilation: integrated air ducts ready for connection (Ø 2") to a technical exhaust system

Front view Side view

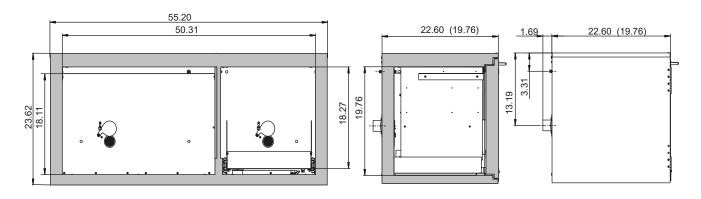

Top view

